



**2.63C**  
**2.63C<sup>Plus</sup>**  
**3.63G**  
WHEEL LOADER

## EQUIPMENT

	2.63C	2.63C <sup>Plus</sup>	3.63G
› Acoustic warnings	•	•	•
› Plugs with keys for fuel and hydraulic tanks	•	•	•
› Bucket with bolted teeth	•	•	•
› ROPS-FOPS cab with heating and pressurization fan, with front and rear windscreen wiper and windshield washer	•	•	•
› Tool box	•	•	•
› Spare parts catalogue	•	•	•
› Seat belt	•	•	•
› Limited slip differential on front axle	•	•	•
› Safety clamp for lifting cylinders	•	•	•
› Visual index for bucket position	•	•	•
› Working lights	•	•	•
› Draw bar hook	•	•	•
› Soundproofing	•	•	•
› Yellow rotating and overturning beacon	•	•	•
› Operation and maintenance manual	•	•	•
› Type-approval for road traffic	•	•	•
› Side rearview mirrors	•	•	•
› Complete instrument panel	•	•	•
› Hydraulic or mechanical quick coupler	0	0	0
› Cement mixing bucket	0	0	0
› Multipurpose bucket (4 in 1)	0	0	0
› Speed reduction kit	0	0	0
› Lifting forks	0	0	0
› Proportional self lock rear differential	0	•	0
› Asphalt and cement planer	0	0	0
› Snow blower	0	0	0
› "V" type snow blade	0	0	0
› Angle-tilt dozer blade	0	0	0
› Hand operating hammer	0	0	0
› Polishing brush	0	0	0
› Trencher	0	0	0

• Standard   0 Optional   – Not available



Via Piratello, 106 - 48022 Lugo (RA) ITALY  
Tel. +39 0545 904411 Fax +39 0545 30389  
e-mail: [info@vf-venieri.com](mailto:info@vf-venieri.com) [www.vf-venieri.com](http://www.vf-venieri.com)

**Spare Parts**  
Tel. +39 0545 904429 Fax +39 0545 24555  
e-mail: [ricambi@vf-venieri.com](mailto:ricambi@vf-venieri.com)







# LITTLE BIG ONES. REDUCED SIZE, UNSTOPPABLE POWER



## Increase your expectations: Venieri's small ones are here!

Thanks to the widely tested project evolution matching the new market requirements, the new machines represent a significant improvement. We are located in the **"Motor Valley"** which, in a small territory, has always been giving birth to fabulous cars and top performing motorbikes! The genetic heritage is very rich: the **Japanese technology** of the **Yanmar engines**, new **Bosch Rexroth transmissions** and a **ratio traction/weight** never before achieved. The **ORA** (oscillating rear axle) is one of the main organs in this series: **there isn't any oscillating mechanical coupling** between the front and rear, ensuring smart working and driving safety on these small ones which can be normally found on big machines only.

## 2.63C

- › "Z" Linkage
- › Max power **50 HP**
- › Bucket capacity **0,70 m³**
- › Max permis. weight **4.800 kg**
- › Std operat. weight **4.150 kg**

## 2.63C *Plus*

- › "Z" Linkage
- › Max power **50 HP**
- › Bucket capacity **0,75 m³**
- › Max permis. weight **4.800 kg**
- › Std operat. weight **4.350 kg**

## 3.63G

- › "Z" Linkage
- › Max power **60 HP**
- › Bucket capacity **0,80 m³**
- › Max permis. weight **6.200 kg**
- › Std operat. weight **4.900 kg**


## ENGINE: JAPANESE TECHNOLOGY

The **4 TNV 88** and **84T Yanmar** engines are designed to match all types of requirements: **low environmental impact**, **low noise** and **limited vibration** transform these engines perfect partners. The continuous efforts to find sustainable solutions to essential needs of human life makes **Yanmar engines** the **best** in terms of **power economy** and **emissions**; **simplicity** and **reliability** are the two main features that brought Venieri to choose Yanmar engines.




## TRANSMISSION: GLOBAL QUALITY

There are many ways to transmit power but only one is able to satisfy even the most demanding customers: **Venieri** and **Bosch-Rexroth** laboratories have studied and developed **one of the best possible combinations of high pressure transmission** (so **high efficiency** transmission with **500 bar\***). In that way the **efficiency** of Venieri's wheel loaders led to a **11% improvement**: try and you'll believe it!

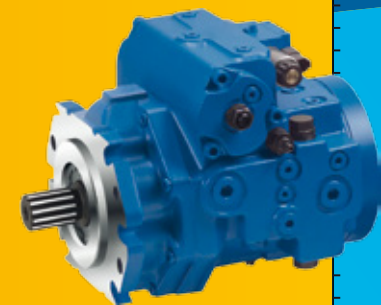

### Extended performance range

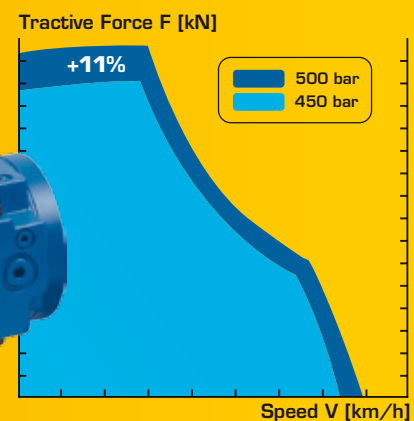

## AXLE: TOP LEVEL EQUIPMENT

The **double fixing** on each side grants **extreme reliability and stiffness to the chassis even after 8000/10000 working hours** and represents a further confirmation of our design philosophy: **small size machines equally designed as the big ones!** The **18° rear oscillation** grants perfect **stability and security** during working and transfer operations.



## GREASING: CENTRALIZED COMFORT

**Maintenance** is fundamental on all machines: Venieri decided to build machines **easy and accessible to anyone**: machines whose maintenance operations can be carried out in an **easy and safe way**, thanks to its particular design. For example, the **3 points of centralized greasing** allow the **rear axle** and the **swinging** to be instantly double checked.





WHEEL LOADER › “Z” LINKAGE

DIESEL ENGINE

4-cylinder engine: port fuel injection, water cooling, paper dry filtering. Emissions as per EC 97/68 stage IIIA rules.

Type .....	Yanmar 4TNV88
Max Power .....	36kW - 50 HP
Rated rpm .....	3.000
Net power ISO/TR 14396 .....	35 kW - 48 HP
Net power EEC/80/1269 .....	35 kW - 48 HP
Bore .....	mm 88
Stroke .....	mm 90
Displacement .....	cm³ 2.190

ELECTRIC SYSTEM

Battery .....	12 Volt
Capacity EN 60095-1 .....	80 Ah - 770 A
Alternator rating .....	65 A
Reverse warning .....	Standard
Wiring according to rules .....	IP 67 e DIN 40050

TRANSMISSION

Hydrostatic transmission with automatic power regulation and closed circuit with variable-displacement pump and engine. Two forward/reverse speeds with single-lever control.

	forward	reverse
1 <sup>st</sup> Gear km/h	0÷7	0÷7
2 <sup>nd</sup> Gear km/h	0÷20	0÷20

AXLES

All wheel drive. Two heavy duty axles with planetary final drives on each wheel.  
Fixed rigid drive axle on front chassis section. Oscillating drive axle on rear chassis section up to a 20° total angle.  
Transfer gearbox allowing the rear and the front movement by means of a transmission shaft.  
Self-locking limited slip differential on front axle (optional on rear axle).

BRAKES

Service: drum-brake hydraulically operating on front axle working on all the wheels. Parking brake: mechanical drum-brake operating on service brake, manually actuated.

TYRES

Standard .....	12.0/75-18 12pr
Optional .....	10.5-18 10pr • 12.5-18 10pr • 15.5/55 R18

STEERING

Servo assisted steering by means of a hydraulic LOAD SENSING system.

Total steering angle .....	80°
Inner steering angle .....	mm 2.193
External tyres turning radius .....	mm 3.790
External bucket turning radius.....	mm 4.210



HYDRAULIC SYSTEM

Hydraulic gear pump with LOAD SENSING priority valve for steering circuit. 2-section modular control valve with main relief valve. Double-acting hydraulic cylinders. Hydraulic oil cooling radiator. Full-flow oil filter on the return circuit. Single control cloche-lever with 4-position bucket lifting system and 3-position auxiliary control system.

Max flow .....	lt./1'	60
Loader relief valve pressure .....	bar	200
Steering relief valve pressure .....	bar	190
Lifting cylinder .....	mm	70x937
Bucket cylinder .....	mm	80x395

SERVICES CAPACITIES




Engine .....	lt	8
Front axle .....	lt	5,8
Rear axle + gear box .....	lt	6,5
Hydraulic circuit .....	lt	57
Brake system .....	lt	1,1
Fuel .....	lt	70
Water cooling .....	lt	10

TECHNICAL FEATURES

Standard bucket capacity .....	m³	0,70
Bucket width .....	mm	1.700
Straight static tipping load .....	kg	3.000
Full turned 40° tipping load.....	kg	2.700
Lifting capacity at max. height.....	kg	2.600
Dump clearance.....	mm	3.100
Dump height at 43°.....	mm	2.450
Reach at 43°.....	mm	650
Breakout force .....	kg	4.000

DIMENSIONS AND WEIGHT

Max lenght in transfer position .....	mm	4.800
Max width in transfer position .....	mm	1.700
Max height .....	mm	2.460
Track width .....	mm	1.320
Overall tyre width .....	mm	1.640
Wheel base.....	mm	1.950
Ground clearance .....	mm	370
Standard operating weight.....	kg	4.150
Max permissible weight .....	kg	4.800

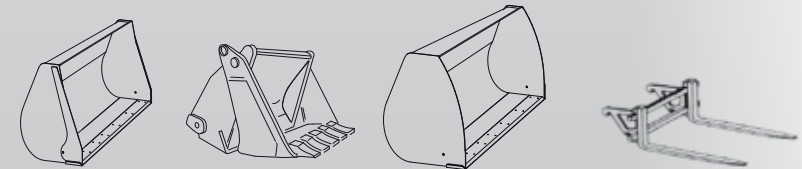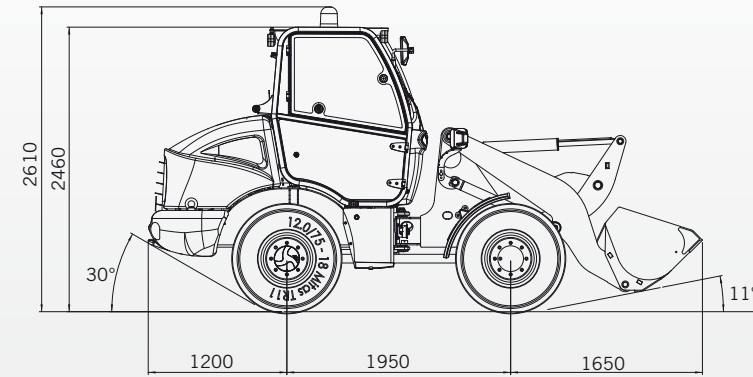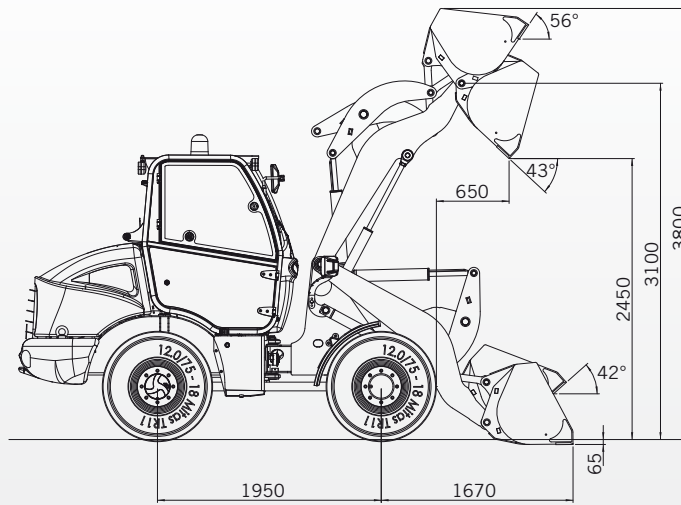

PERFORMANCE DATA

		UNIVERSAL BUCKET	MULTI PURPOSE BUCKET	OVERSIZE	FORKS
Full load bucket capacity (SAE)	m³	0,70	0,6	1,2	/
Bucket width	mm	1.700	1.700	1.900	/
Bucket weight	kg	250	250	350	/
Max operative height	mm	3.800	3.750	3.850	/
Forks lengthh (Standard)	mm				1.000
Forks lengthh (Optional)	mm				1.200
Bucket pin height	mm	3.100	3.100	3.100	/
Dump clearance	°	43°	43°	43°	/
Dump height	mm	2.450	2.500	2.400	/
Dump distance	mm	650	600	700	/
Max dump distance	mm	1.450	1.400	1.500	/
Bucket static tipping load, straight	kg	3.000	2.900	2.700	/
Bucket static tipping load, full turn (40°)	kg	2.700	2.600	2.400	/
Forks static tipping load, full turn (40°)	kg				2.200
Forks Payload EN 474-3 (80%)	kg				1.800
Forks Payload EN 474-3 (60%)	kg				1.400
Breakout force	kg	4.000	4.400	3.700	/
Total length	mm	4.800	4.750	4.800	/
External bucket turning radius	mm	4.200	4.000	4.300	/
Total weight	kg	4.150	4.200	4.200	/

WHEEL LOADER › “Z” LINKAGE

DIESEL ENGINE

Engine: 4 cylinders, direct injection, water cooled, paper dry filter. Emissions in accordance with EC 97/68 stage IIIA rules.

Type .....	Yanmar 4TNV88
Max Power .....	36kW - 50 HP
Rated rpm .....	3.000
Net power ISO/TR 14396 .....	35 kW - 48 HP
Net power EEC/80/1269 .....	35 kW - 48 HP
Bore .....	mm 88
Stroke .....	mm 90
Displacement .....	cm³ 2.190

ELECTRIC SYSTEM

Battery .....	12 Volt
Capacity EN 60095-1 .....	80 Ah - 770 A
Alternator rating .....	65 A
Reverse warning .....	Standard
Wiring according to rules .....	IP 67 e DIN 40050

TRANSMISSION

Hydrostatic transmission with automatic power regulation and closed circuit with variable-displacement pump and engine. Two forward/reverse speeds with single-lever control.

	forward	reverse
1 <sup>st</sup> Gear km/h	0÷7	0÷7
2 <sup>nd</sup> Gear km/h	0÷28	0÷28

AXLES

All wheel drive. Two heavy duty axles with planetary final drives on each wheel.  
Fixed rigid drive axle on front chassis section. Oscillating drive axle on rear chassis section up to a 20° total angle.  
Transfer gearbox allowing the rear and the front movement by means of a transmission shaft.  
Self-locking limited slip differential on front axle (optional on rear axle).

BRAKES

Service: drum-brake hydraulically operating on front axle working on all the wheels. Parking brake: mechanical drum-brake operating on service brake, manually actuated.

TYRES

Standard .....	12.0/75-18 12pr
Optional ....	10.5-18 10pr • 12.5-18 10pr • 15.5/55 R18

STEERING

Servo assisted hydraulic steering with LOAD SENSING system.	
Total steering angle .....	80°
Inner tyres turning radius .....	mm 2.193
External tyres turning radius .....	mm 3.790
External bucket turning radius.....	mm 4.210



HYDRAULIC SYSTEM

Hydraulic gear pump with LOAD SENSING priority valve for steering circuit. 2-section modular control valve with main relief valve. Double-acting hydraulic cylinders. Hydraulic oil cooling radiator. Full-flow oil filter on the return circuit. Single control cloche-lever with 4-position bucket lifting system and 3-position auxiliary control system.

Max flow .....	lt/1'	60
Loader relief valve pressure .....	bar	230
Steering relief valve pressure .....	bar	190
Lift cylinder .....	mm	70x937
Bucket cylinder .....	mm	80x395

SERVICES CAPACITIES




Engine .....	lt	8
Front axle .....	lt	5,8
Rear axle + gear box .....	lt	6,5
Hydraulic circuit .....	lt	57
Brake system .....	lt	1,1
Fuel .....	lt	70
Water cooling .....	lt	10

TECHNICAL FEATURES

Standard bucket capacity .....	m³	0,75
Standard bucket width.....	mm	1.700
Straight static tipping load .....	kg	3.300
Full turned 40° tipping load.....	kg	3.000
Lifting capacity at max. height.....	kg	3.100
Dump clearance.....	mm	3.100
Dump height at 43°.....	mm	2.450
Reach at 43°.....	mm	650
Breakout force .....	kg	4.000

DIMENSIONS AND WEIGHT

Max lenght in transfer position .....	mm	4.800
Max width in transfer position .....	mm	1.700
Max height .....	mm	2.460
Track width .....	mm	1.320
Overall tyre width .....	mm	1.640
Wheel base.....	mm	1.950
Ground clearance .....	mm	370
Standard operating weight.....	kg	4.350
Max permissible weight .....	kg	4.800

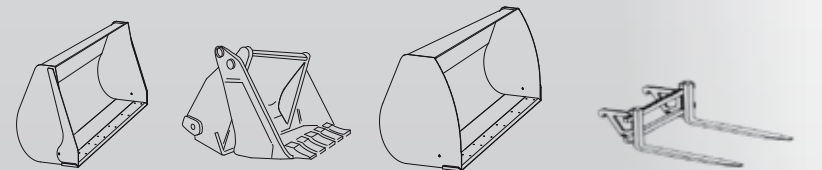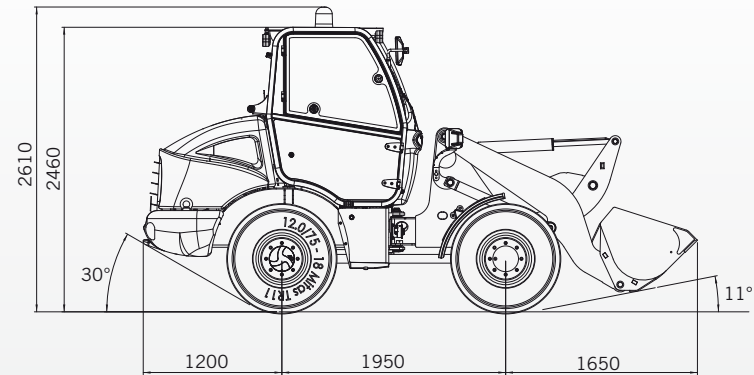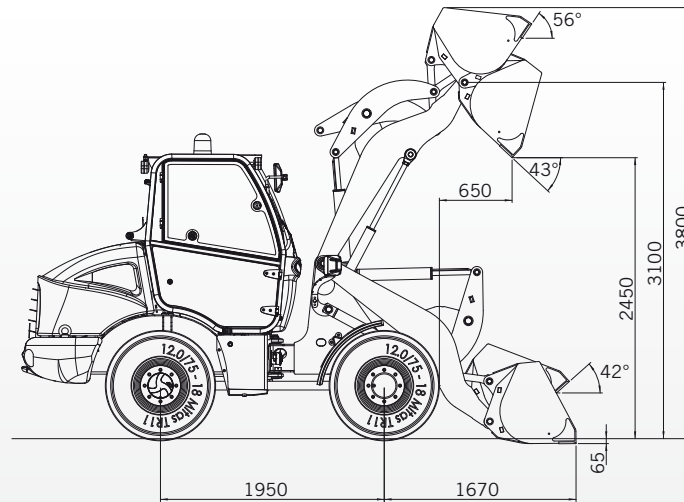

PERFORMANCE DATA

		UNIVERSAL BUCKET	MULTI PURPOSE BUCKET	OVERSIZE	FORKS
Full load bucket capacity (SAE)	m³	0,75	0,6	1,2	/
Bucket width	mm	1.700	1.700	1.900	/
Bucket weight	kg	250	350	350	/
Max operative height	mm	3.800	3.750	3.850	/
Forks lenthth (Standard)	mm				1.000
Forks lenthth (Optional)	mm				1.200
Bucket pin height	mm	3.100	3.100	3.100	/
Dump clearance	°	43°	43°	43°	/
Dump height	mm	2.450	2.500	2.400	/
Dump distance	mm	650	600	700	/
Max dump distance	mm	1.450	1.400	1.500	/
Bucket static tipping load, straight	kg	3.300	3.200	2.900	/
Bucket static tipping load, full turn (40°)	kg	3.000	2.900	2.700	/
Forks static tipping load, full turn (40°)	kg				2.400
Forks Payload EN 474-3 (80%)	kg				1.920
Forks Payload EN 474-3 (60%)	kg				1.440
Breakout force	kg	5.400	5.800	5.100	/
Total length	mm	4.800	4.750	4.800	/
External bucket turning radius	mm	4.200	4.000	4.300	/
Total weight	kg	4.350	4.700	4.700	/

TRANSMISSION

% Traction/Weight	71 %
Pump	500 bar
Hydrostatic engine	500 bar



WHEEL LOADER › “Z” LINKAGE

DIESEL ENGINE

4-cylinder engine: port fuel injection, water cooling, paper dry filtering. Emissions as per EC 97/68 stage IIIA rules.

Type .....	Yanmar 4TNV84T
Max Power .....	44 KW - 60 HP
Rated rpm .....	3.000
Net power ISO/TR 14396 .....	42 KW - 57 HP
Net power EEC/80/1269 .....	42 KW - 57 HP
Bore .....	mm 84
Stroke .....	mm 90
Displacement .....	cm³ 1.995

ELECTRIC SYSTEM

Battery .....	12 Volt
Capacity EN 60095-1 .....	100 Ah - 850 A
Alternator rating .....	40 A
Reverse warning .....	Standard
Wiring according to rules .....	IP 67 e DIN 40050

TRANSMISSION

Hydrostatic transmission with automatic power regulation and closed circuit with variable-displacement pump and engine. Two forward/reverse speeds with single-lever control.

	forward	reverse
1 <sup>st</sup> Gear km/h	0÷9	0÷9
2 <sup>nd</sup> Gear km/h	0÷30/34*	0÷30/34*

(\*) High speed optional.

AXLES

All wheel drive. Two heavy duty axles with planetary final drives on each wheel.  
Fixed rigid drive axle on front chassis section. Oscillating drive axle on rear chassis section up to a 20° total angle.  
Transfer gearbox allowing the rear and the front movement by means of a transmission shaft.  
Self-locking limited slip differential on front axle (optional on rear axle).

BRAKES

Service: drum-brake hydraulically operating on front axle working on all the wheels. Parking brake: mechanical drum-brake operating on service brake, manually actuated.

TYRES

Standard .....	405/70 R18"
Optional .....	12,5-20" 12pr

STEERING

Servo assisted hydraulic steering with LOAD SENSING system.

Total steering angle .....	80°
Inner tyres turning radius .....	mm 2.220
External tyres turning radius .....	mm 4.050
External bucket turning radius .....	mm 4.350



HYDRAULIC SYSTEM

Hydraulic gear pump with LOAD SENSING priority valve for steering circuit. 2-section modular control valve with main relief valve. Double-acting hydraulic cylinders.  
Hydraulic oil cooling radiator. Full-flow oil filter on the return circuit. Single control cloche-lever with 4-position bucket lifting system and 3-position auxiliary control system.

Max flow .....	lt/1'	60
Loader relief valve pressure .....	bar	230
Steering relief valve pressure .....	bar	190
Lift cylinder .....	mm	70x937
Bucket cylinder .....	mm	80x895

SERVICES CAPACITIES




Engine .....	lt	7,5
Front axle .....	lt	5,8
Rear axle + gear box .....	lt	6,5
Hydraulic circuit .....	lt	57
Brake system .....	lt	1,1
Fuel .....	lt	70
Water cooling .....	lt	10

TECHNICAL FEATURES

Standard bucket capacity .....	m³	0,80
Bucket width .....	mm	1.900
Straight static tipping load .....	kg	3.850
Full turned 40° tipping load .....	kg	3.450
Lifting capacity at max. height .....	kg	2.500
Dump clearance .....	mm	3.200
Dump height at 40° .....	mm	2.600
Reach at 40° .....	mm	700
Breakout force .....	kg	4.700

DIMENSIONS AND WEIGHT

Max lenght in transfer position .....	mm	4.886
Max width in transfer position .....	mm	1.900
Max height .....	mm	2.550
Track width .....	mm	1.360
Overall tyre width .....	mm	1.820
Wheel base .....	mm	2.036
Ground clearance .....	mm	340
Standard operating weight .....	kg	4.900
Max permissible weight .....	kg	5.750

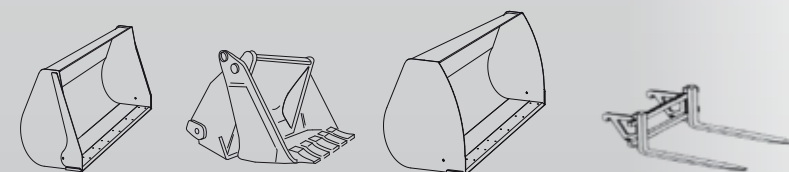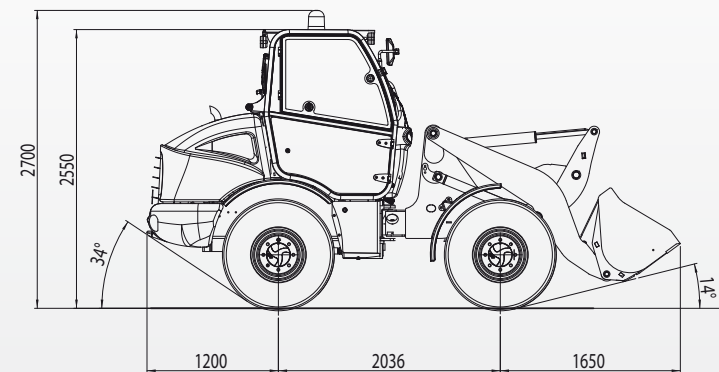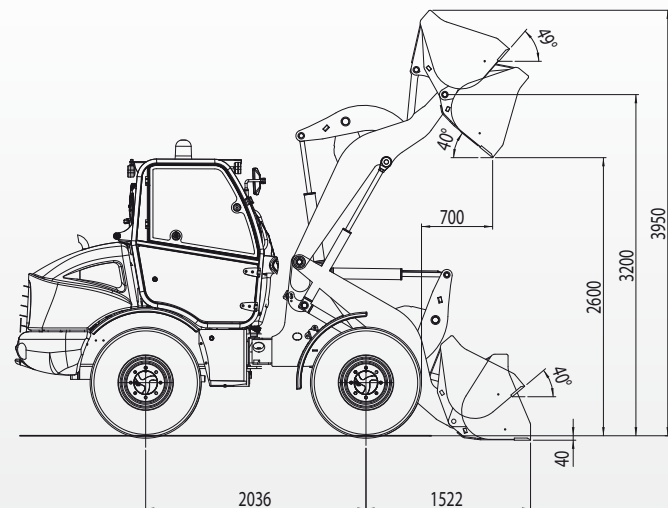

PERFORMANCE DATA

		UNIVERSAL BUCKET	MULTI PURPOSE BUCKET	OVERSIZE	FORKS
Full load bucket capacity (SAE)	m³	0,8	0,7	1,5	/
Bucket width	mm	1.900	1.900	2.100	/
Bucket weight	kg	350	450	450	/
Max operative height	mm	3.950	3.750	3.900	/
Forks lengthh (Standard)	mm				1.000
Forks lengthh (Optional)	mm				1.200
Bucket pin height	mm	3.200	3.200	3.200	/
Dump clearance	°	40°	40°	40°	/
Dump height	mm	2.600	2.625	2.500	/
Dump distance	mm	700	730	750	/
Max dump distance	mm	2.000	1.950	2.100	/
Bucket static tipping load, straight	kg	3.850	4.100	3.650	/
Bucket static tipping load, full turn (40°)	kg	3.450	3.700	3.250	/
Forks static tipping load, full turn (40°)	kg				2.650
Forks Payload EN 474-3 (80%)	kg				2.120
Forks Payload EN 474-3 (60%)	kg				1.590
Breakout force	kg	4.700	5.000	4.400	/
Total length	mm	4.886	4.936	4.936	/
External bucket turning radius	mm	4.350	4.300	4.400	/
Total weight	kg	4.900	5.000	5.000	/






### 80° articulation.

Cramped conditions do not scare us.



### Steering console.

A master piece for all job requirements!

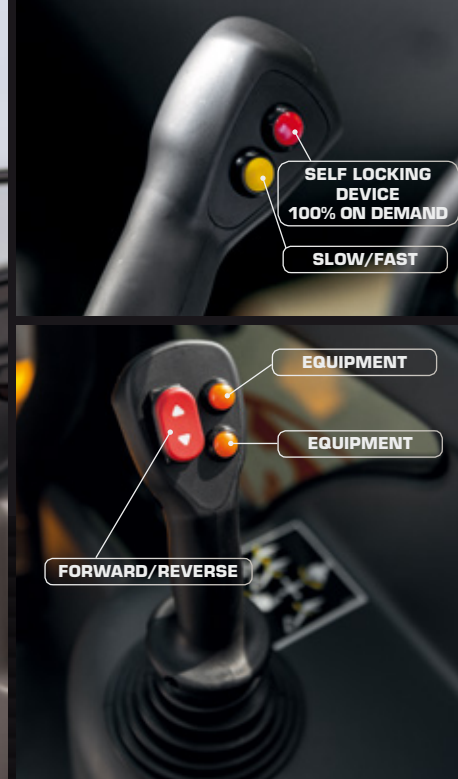

### Multipurpose Joystick.

You can do everything with one hand!



### Hydraulic quick coupling.

Use your Venieri as a universal tool carrier thanks to the interchangeability of most quick couplings/equipment!



### Linkage connection on the chassis with cantilevered pins.

+ performance, better visibility  
= less risk!



### Arms Connection with ovalized section.

We want to see clearly!



### Framed glass door and flat glass.

We combine style with efficiency!



### Evolved and complete hydraulic.

Not only High Flow kit but also additional hydraulic kit for tools and equipments. An example? Hand operated hydraulic demolition hammer!

